

WINE MASTER

le temps d'être différent

DESIGN, SILENCE AND SAVINGS

The WINE IN50+ air conditioner features new materials, «Energy Saving System» technology, and is easy to install – all of these features come together to make it an excellent, stand-out product on the market.

WINE CELLAR AIR CONDITIONER



50 m³

Air-conditioning up to 50m³



High performance integrated thermostat



Quiet



Respectful of the environment



Ideal climate conditions for the preservation of your wine

WINE IN50+

THE BUILT IN







WINEIN50+

DESIGN, SILENCE AND SAVINGS

- Keeps cellars at a constant temperature of between 8 and 18 °C*
- Equipped with an ENERGY SAVER MOTOR vent, a rotary compressor and a reaction turbine for considerable energy savings
- Humidity control : excess humidity is condensed and evacuated towards the outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Easy upkeep: just a filter that needs to be changed once a year
- 2 year guarantee

UNIT DELIVERED WITH :

- 1 x straight duct with Ø 160 mm connecting sleeve - length 1000 mm
- 2 x telescope wall feedthrough pipes with a vented closure flap on the blowing side
- Optional: IN50+ kit which features two 2m ducts + two support collars + 2 right-bends connecting pipes

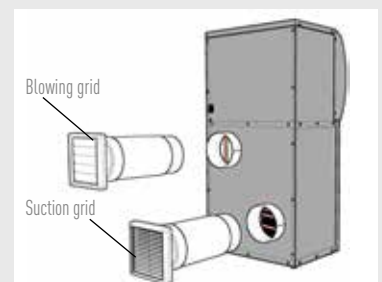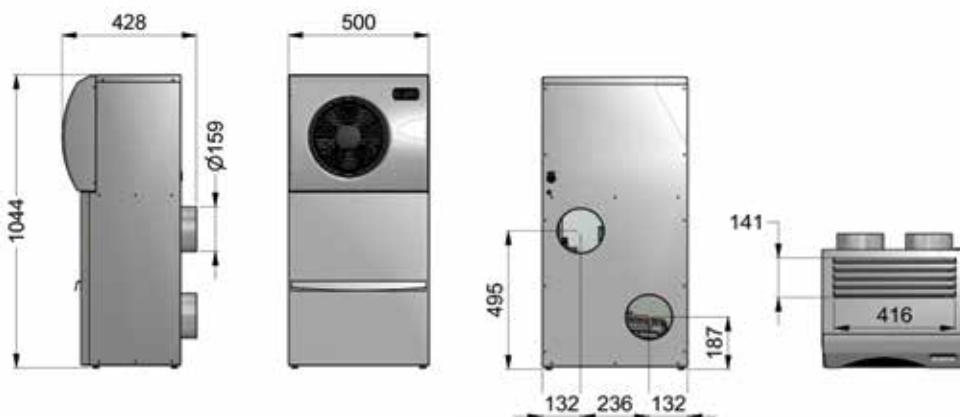




PERFECT INTEGRATION AND ALWAYS MORE SAVINGS

The WineMaster® IN50+ air conditioner is equipped with high performance technology that is quiet and ensures significant energy savings (up to 30% less consumption compared to standard air conditioners).

DISCREET SETUP :

Its design allows it to blend into cellars perfectly. In order to facilitate execution, the pipes open out onto the back in a staggered fashion, with a suction nozzle and a blowing nozzle.

THE BUILT IN WINEMASTER®

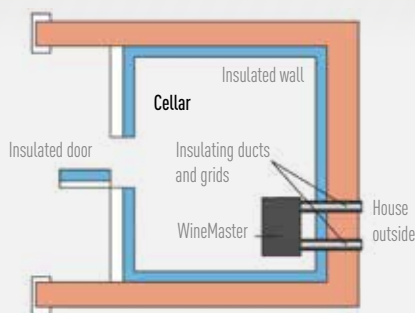

REFERENCE	WINE IN50+
Electrical supply	230-240 V - 50Hz
Air conditioning capacity*	Up to 50 m ³ *
Overall dimensions	H.1044 x W.500 x D.428 mm
Weight	53 Kg
Cooling capacity	1200 W at 15 °C
Electrical power absorbed	550 W
Sound level in the cellar (at 1m and 3m)	50 dB / 43 dB
Cellar airflow rate (cold side)	430 m ³ /h
Outside airflow rate (hot side)	450 m ³ /h
Coolant	R407 C
Heat resistance	500 W
Maximum outside temperature**	35°C

* With right insulation and adapted to the volume of the cellar.

** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C.

DISCOVER OUR OTHER SPECIAL PRODUCTS : HYGROMASTER® & WINEMASTER® CELLAR DOOR

HYGROMASTER®

On the wall, on the ground, or on a stable shelf, Hygromaster® is very easy to install. You can simply connect it to the water tank that comes with it. This reservoir kit supplies the Hygromaster® with demineralized water. You can regulate the level of humidity to ensure it is appropriate for your wine cellar.



WINEMASTER® CELLAR DOOR

The WineMaster® cellar door guarantees the optimal insulation of your wine cellar, a real asset to some of our WineMaster® air conditioners. It is very easy to install with only 7 fixing points for mounting the set and two possible opening versions (right or left).



A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian vineyards, where the wine route starts, that the WineMaster® story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

“ INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES. ”



WINE MEDIA Text and photo are not contractual

WINEMASTER
le temps d'être différent

Z.I. VIEUX-THANN ■ 18 RUE GUY DE PLACE
BP 60010 ■ F68801 THANN CEDEX
Tél : +33 (0) 389 377 515 ■ E-mail : contact@winemaster.fr
www.winemaster.fr